


## GLIDETECH® VINEYARD

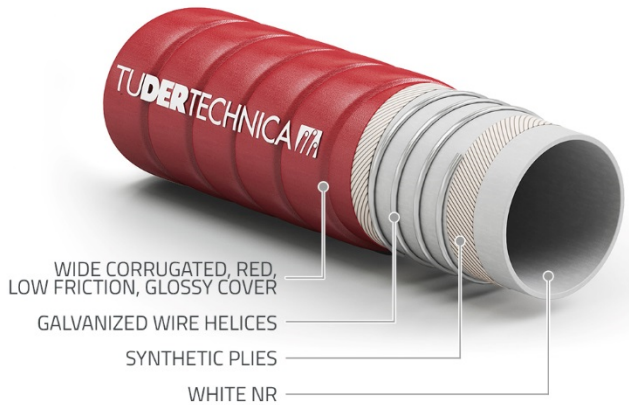

### TECHNICAL CHARACTERISTICS

**Temperature range** : -40°C / +80°C ( -40°F / +176°F )

**Norm** : ISO 1307 for dimensional tolerances



Extra flexible suction and delivery hose suitable for wine and vinification by-products.

### DESCRIPTION

#### Tube

NR, white, phthalates free, tested in compliance with 1907/2006/CE (REACH). Meets FDA 21 CFR 177.2600, BFR recommendation XXI cat 2, DM 21.03.73 e seguenti, EUROPEAN REGLEMENT 1935/2004/CE, JAPAN-Ministry of Health and Welfare Notice No.370,1959 and No.201,2006.

#### Reinforcement

synthetic plies, galvanized wire helices

#### Cover

wide corrugated, red, low friction material, non-marking when dragged on the floor, abrasion, ageing, ozone, oil and chemical resistant, easy to clean, glossy cover

#### Sterilization

refer to guidelines for cleaning and sanitizing on Tudertecnica website

#### Marking

TUDERTECHNICA GLIDETECH® VINEYARD

Inside diameter		Th. outside diameter		Vacuum		Working pressure		Burst pressure		Appr. weight		Bending radius	
[mm]	[in]	[mm]	[in]	[bar]	[psi]	[bar]	[psi]	[bar]	[psi]	[kg/mt]	[lbs/ft]	[mm]	[in]
25	1,00	37	1,46	0,9	13	10	150	30	450	0,82	0,55	70	2,76
38	1,50	51,5	2,03	0,9	13	10	150	30	450	1,23	0,82	80	3,15
51	2,00	66	2,60	0,9	13	10	150	30	450	1,90	1,27	100	3,94
63,5	2,50	78,5	3,09	0,9	13	10	150	30	450	2,30	1,54	130	5,12
76	3,00	92	3,62	0,9	13	10	150	30	450	2,90	1,94	150	5,91
102	4,00	118	4,65	0,9	13	10	150	30	450	3,78	2,53	250	9,84

Other diameters, wall thickness, cover colours and pressure only on specific request. Data refer to ambient temperature (20°C).